


PROFESSIONAL
AIR SPRAY GUN

ISO 9001



Certificate TW04/02301QA


2012

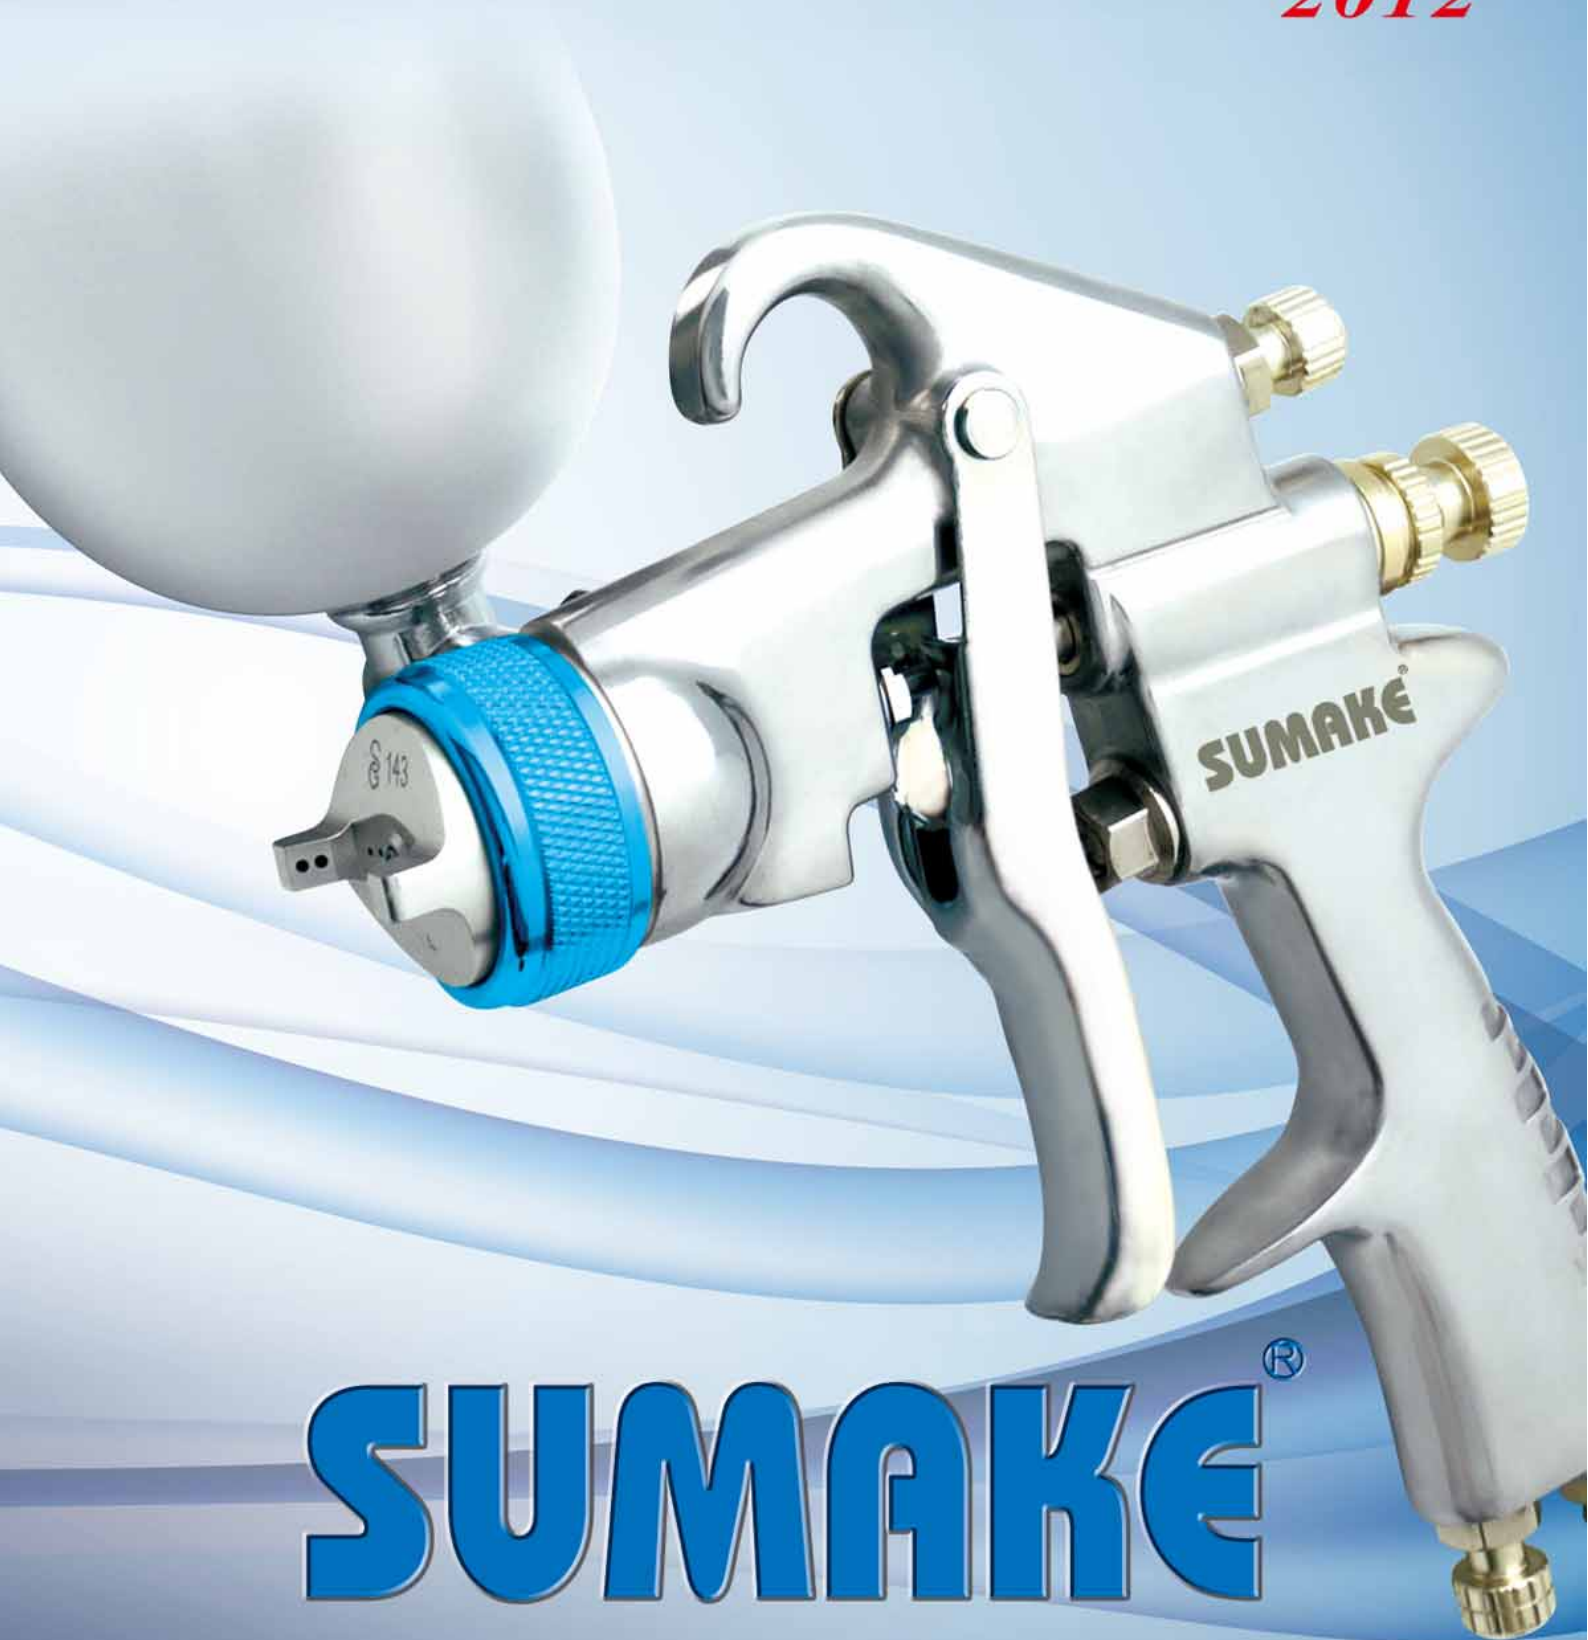

SUMAKE[®]

CE

Superior Quality
Bester Qualität
Calidad Superior
Qualité supérieure
品質高い

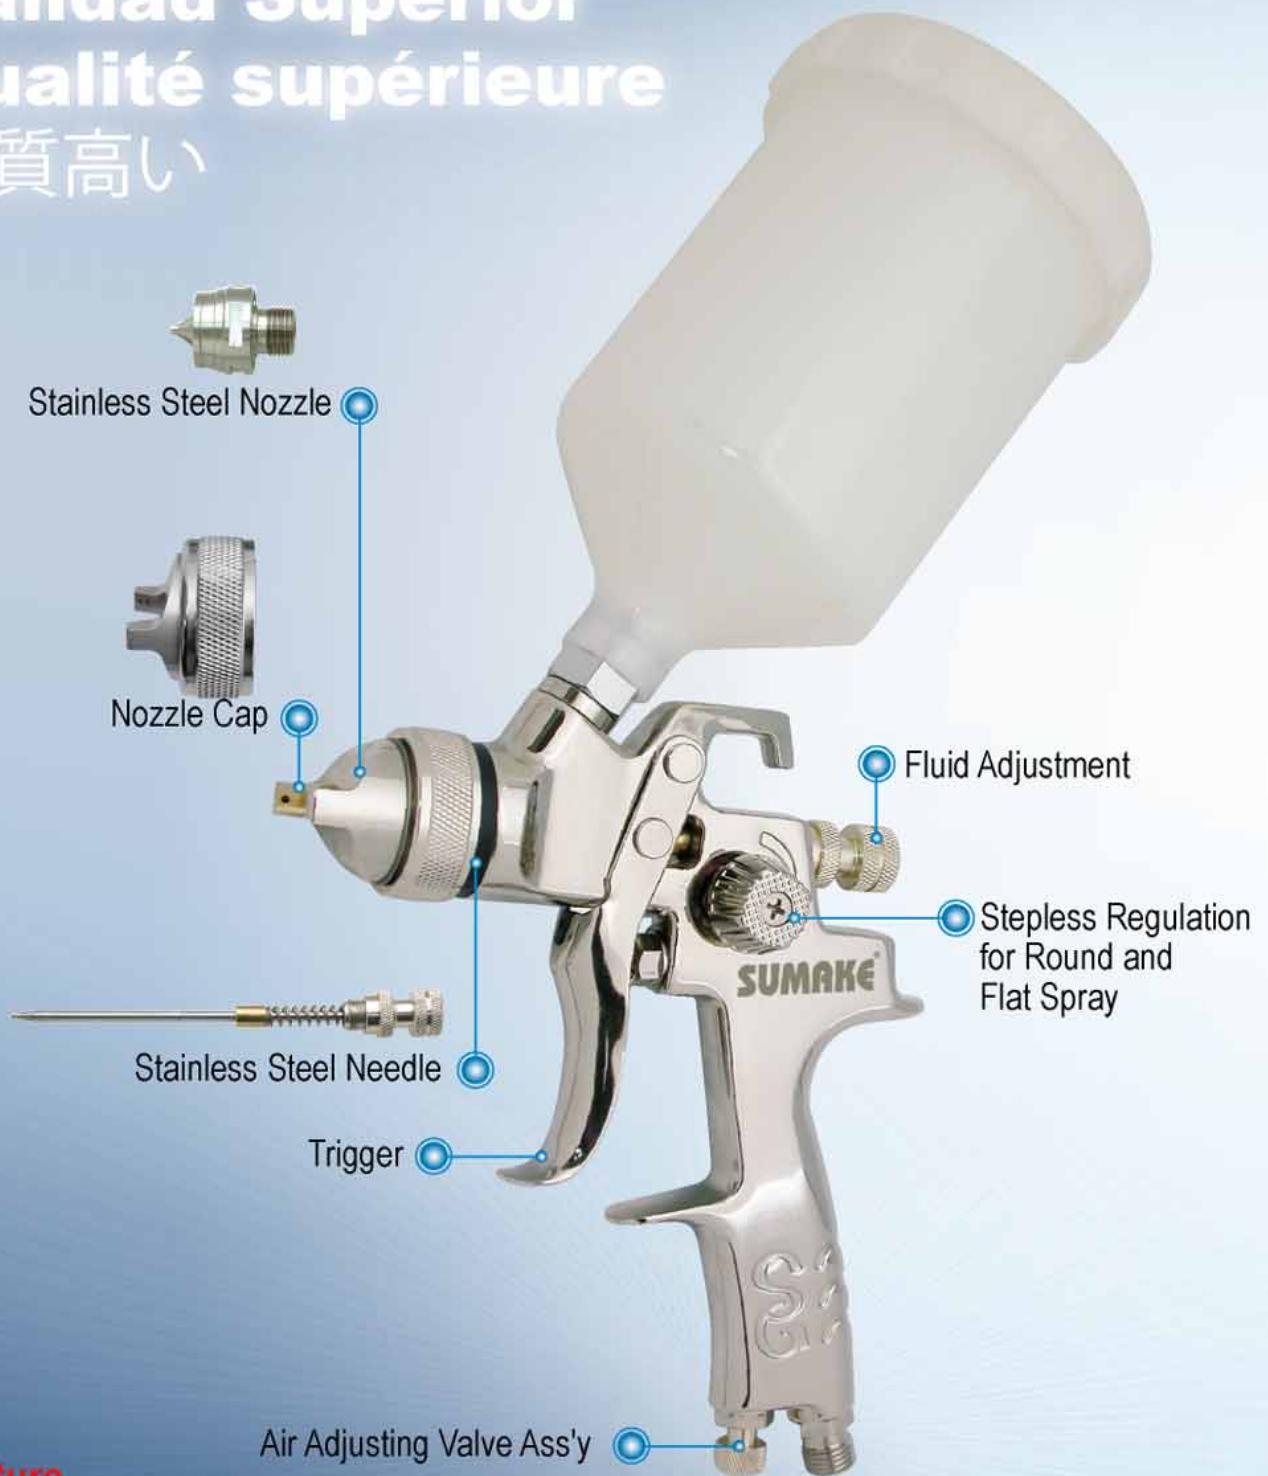

Feature

1. Save paint, make high efficiency
2. Sturdy, long-lasting
3. Easy maintenance
4. Lightweight, ergonomic design and easy trigger pivot reduce operating fatigue
5. Reduce the operation cost by diminishing the square measure repeatedly sprayed
6. The patented air circulation principle offers low air consumption with superior atomization

HP High Pressure



SS-1402G
HP Gravity Type
W / 125c.c. Plastic Cup



SS-1410G
HP Gravity Type
W / 400c.c. Alum. Cup



SS-1411G
HP Gravity Type
W / 400c.c. Alum. Cup



SS-1420G
HP Gravity Type
W / 600c.c. Plastic Cup



SS-1422G
HP Gravity Type
W / 600c.c. Plastic Cup



SS-1426G
HP Gravity Type
W / 600c.c. Plastic Cup



SS-1410S
HP Suction Type
W / 1000c.c. Alum. Cup



SS-1411S
HP Suction Type
W / 1000c.c. Alum. Cup



SS-1422S
HP Suction Type
W / 1000c.c. Alum. Cup

Specification:

Model No.	Feed Type	Standard Nozzle mm	Optional Nozzle mm	Capacity of Cup (l.)	Air Inlet (NPS)	Air Hose (NPS)	Avg. Air Consumption		Net Weight		Recommend Air Pressure		Packing Pcs/Ctn/G.W./Cuft (kgs)
							cfm	l/min	lbs	kgs	psi	kg/cm ²	
SS-1402G	Gravity	1.0	0.5,0.8,1.2	0.125	1/4"	-	3.18	90	0.62	0.28	30-45	2.1-3.0	20Pcs/Ctn/14.3/1.2'
SS-1410G	Gravity	1.4	1.2,1.6,1.8,2.0,2.5	0.4	1/4"	3/8"	7.78	220	1.13	0.514	30-45	2.1-3.0	10pcs/Ctn/10/1.7'
SS-1411G	Gravity	1.4	0.8,1.1,1.8,2.0,2.5	0.4	1/4"	1/4"	6.65	190	1.05	0.476	30-45	2.1-3.0	10pcs/Ctn/10.6/1.3'
SS-1420G	Gravity	1.4	1.2,1.6,1.8,2.0,2.5	0.6	1/4"	3/8"	7.78	220	1.13	0.514	30-45	2.1-3.0	10pcs/Ctn/10/1.7'
SS-1422G	Gravity	1.4	1.3,1.5,1.7,2.0,2.5	0.6	1/4"	3/8"	7	200	1.36	0.62	30-45	2.1-3.0	10pcs/Ctn/11/1.7'
SS-1426G	Gravity	1.4	1.2,1.3,1.6,1.8,2.0,2.5	0.6	1/4"	3/8"	7.4	210	1.13	0.514	30-45	2.1-3.0	10pcs/Ctn/10/1.7'
SS-1410S	Suction	1.4	1.2,1.6,1.8,2.0,2.5	1	1/4"	3/8"	7.78	220	1.13	0.514	30-45	2.1-3.0	10pcs/Ctn/10/1.7'
SS-1411S	Suction	1.8	1.1, 1.4,2.0,2.5	1	1/4"	3/8"	6.65	190	1.54	0.7	30-45	2.1-3.0	10pcs/Ctn/11.5/2.2'
SS-1422S	Suction	1.4	1.3,1.5,1.7,2.0,2.5	1	1/4"	3/8"	7	200	1.36	0.62	30-45	2.1-3.0	10pcs/Ctn/11/1.7'

HVLP SPRAY GUN



HVLP = High Volume Low Pressure - low spray pressure technology, operate at 10psi at the nozzle cap, transfer 70% paint on the surface being coated - designates an internationally recognized low pressure application method, extra savings with maximum transfer efficiency but with less air consumption. Little overspray, saving on paint cost and environmental protection.

Sumake's innovative HVLP creates a very fine silky

Superior Quality

HVLP High Volume Low Pressure



SS-1401HG
HVLP Gravity Type
W / 125c.c. Plastic Cup



SS-1410HG
HVLP Gravity Type
W / 400c.c. Alum. Cup



SS-1420HG
HVLP Gravity Type
W / 600c.c. Plastic Cup



SS-1421HG
HVLP Gravity Type
W / 600c.c. Plastic Cup



SS-1422HG
HVLP Gravity Type
W / 600c.c. Plastic Cup



SS-1423HG
HVLP Gravity Type
W / 600c.c. Plastic Cup



SS-1410HS
HVLP Suction Type
W / 1000c.c. Alum. Cup



SS-1422HS
HVLP Suction Type
W / 1000c.c. Alum. Cup

Specification:

Model No.	Feed Type	Standard Nozzle mm	Optional Nozzle mm	Capacity of Cup (L.)	Air Inlet (NPS)	Air Hose (NPS)	Avg. Air Consumption		Net Weight		Recommend Air Pressure		Packing Pcs/Ctn/G.W./Cuft (kgs)
							cfm	l/min	lbs	kgs	psi	kg/cm ²	
SS-1401HG	Gravity	1.0	0.5,0.8,1.2	0.125	1/4"	3/8"	3.85	109	0.62	0.28	15-28	0.7-2.0	20pcs/Ctn/11.5/1.2'
SS-1410HG	Gravity	1.4	1.2,1.6,1.8,2.0,2.5	0.4	1/4"	3/8"	7.78	220	1.13	0.514	15-28	0.7-2.0	10pcs/Ctn/10/1.7'
SS-1420HG	Gravity	1.4	1.2,1.6,1.8,2.0,2.5	0.6	1/4"	3/8"	10.3	290	1.13	0.514	15-28	0.7-2.0	10pcs/Ctn/10/1.7'
SS-1421HG	Gravity	1.4	1.7,1.9,2.1,2.5	0.6	1/4"	3/8"	6.36	180	0.99	0.45	15-28	0.7-2.0	10pcs/Ctn/10.3/1.7'
SS-1422HG	Gravity	1.4	1.3,1.5,1.7,2.0,2.5	0.6	1/4"	3/8"	9.15	260	1.36	0.62	15-28	2.1-3.0	10pcs/Ctn/11/1.7'
SS-1423HG	Gravity	1.7	1.3,1.5,2.0,2.5	0.6	1/4"	3/8"	9.5	270	1.36	0.62	15-28	0.7-2.0	10Pcs/Ctn/11/1.7'
SS-1410HS	Suction	1.4	1.2,1.6,1.8,2.0,2.5	1	1/4"	3/8"	7.78	220	1.13	0.514	15-28	0.7-2.0	10pcs/Ctn/11.5/1.7'
SS-1422HS	Suction	1.4	1.3,1.5,1.7,2.0,2.5	1	1/4"	3/8"	7	200	1.36	0.62	15-28	2.1-3.0	10pcs/Ctn/11/1.7'

RP SPRAY GUN



RP = Reduced Pressure - The Reduced Pressure Spray Guns utilize less air than HVLP guns, providing the same transfer efficiency and low overspray of HVLP guns. They provide the best balance of fast working speed, superior atomization for clears and flat colors and super low overspray levels. Good choice for spray painting of middle or high adhesive for surface finishing and

Superior Quality



SS-1424RG
RP Gravity Type
W / 600c.c. Plastic Cup



SS-1425RG
RP Gravity Type
W / 600c.c. Plastic Cup



SS-1240RG
RP Gravity Type
W/600C.C. Plastic Cup






SS-1240RGA
RP Gravity Type
W/600C.C. Alum. Cup



SS-1240RGA-1
RP Gravity Type
W/1000C.C. Alum. Cup

Specification:

Model No.	Feed Type	Standard Nozzle mm	Optional Nozzle mm	Capacity of Cup (l.)	Air Inlet (NPS)	Air Hose (NPS)	Avg. Air Consumption		Net Weight		Recommend Air Pressure		Packing Pcs/Ctn/G.W./Cuft (kgs)
							cfm	l/min	lbs	kgs	psi	kg/cm ²	
SS-1424RG	Gravity	1.3	1.4, 1.7, 1.9, 2.1, 2.5	0.6	1/4"	3/8"	9.9	280	1.36	0.62	15-28	0.7-2.0	10/CTN/10/1.7'
SS-1425RG	Gravity	1.5	1.7, 1.9, 2.1, 2.5	0.6	1/4"	3/8"	9.9	280	1.36	0.62	15-28	0.7-2.0	10/CTN/10/1.7'
SS-1240RG	Gravity	1.3	1.0, 1.4, 1.6, 1.8, 2.0	0.6	1/4"	3/8"	10.2	289	1.32	0.6	29	2.0	10/CTN/10/1.7'
SS-1240RGA	Gravity	1.3	1.0, 1.4, 1.6, 1.8, 2.0	0.6	1/4"	3/8"	10.2	289	1.50	0.68	29	2.0	10/CTN/10/1.7'
SS-1240RGA-1	Gravity	1.3	1.0, 1.4, 1.6, 1.8, 2.0	1.0	1/4"	3/8"	10.2	289	1.54	0.7	29	2.0	10/CTN/10/1.7'

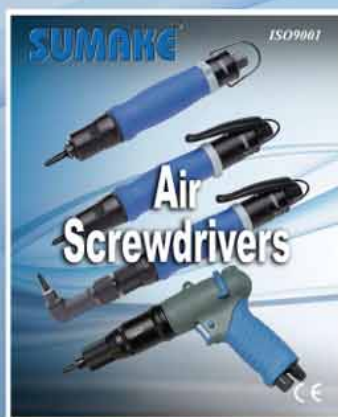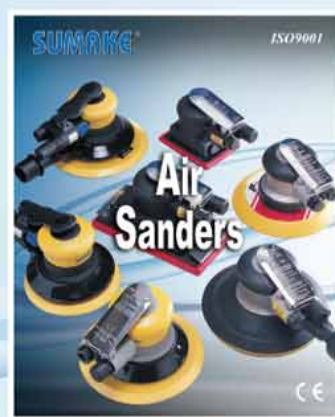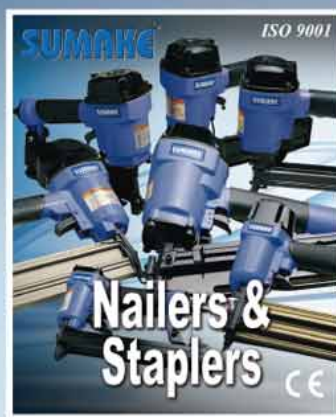

SUMAKE®

SUMAKE Industrial Co., Ltd.

4F, NO.351, Yangguang St., Neihu District, Taipei, Taiwan

Tel: 886-2-2659-3500

Fax: 886-2-2659-3700

<http://www.sumake.com>

<http://www.aircompressors.com.tw>

<http://www.hoses.com.tw>

e-mail: sales@sumake.com.tw

2012ASR